

Digital clock

Digital clock

Style 12e

Description

- ▶ Led clock for outdoor installation.
- ▶ Hour - minute display.
- ▶ Fixed time, fixed temperature or alternate time and temperature display.
- ▶ Height of digit 12 cm, optimal viewing distance 40 metres.
- ▶ Diode colours: red, yellow.
- ▶ Models: independent / 24V minute impulse receiver, IRIG-B/AFNOR coded time receiver, wireless DHF receiver or radio synchronised (FI or DCF signal).



Technical features

- ▶ Matte black aluminium casing.
- ▶ Operating temperature: from -30 to 60°C.
- ▶ Weight: 6 Kg.
- ▶ Protection index : IP53, IK07.
- ▶ Adjustable brightness by automatic photo cell.
- ▶ Angle of vision 120°.
- ▶ 24 hour display mode.
- ▶ Data saving for 3 days.
- ▶ Accuracy of the time quartz base: 0.2 second/day.
- ▶ Silent operation.
- ▶ Programming and time setting through 2 buttons.
- ▶ Digit made of 7 segments with 9 Led each.
- ▶ Power supply: 230VAC, 50/60 Hz.
- ▶ Consumption: 54 mA.
- ▶ Electric protection: class 1.
- ▶ Temperature display from -55°C to +99°C.
- ▶ Display resolution: 1°C. Accuracy: +/-0.5°C.
- ▶ Offset adjustment, possible from - 9° to + 9°.


Norms

- ▶ Norm NF EN50081-1: generic emission standard.
- ▶ Norm NF EN50082-1: generic immunity standard.
- ▶ Norm NF EN60950: safety of information technology equipment.
- ▶ Norm NF EN300-220-3: radio equipment standard.
- ▶ Norm NF EN301-489-3: EMC standard for radio equipment.

Mounting Accessories


- ▶ Adaptation support Style 12e V1/V2 935 005
- ▶ Single or double sided bracket 935 006
- ▶ Back cover (single-sided mounting on pole) 935 008

Led colours




Dimensions in mm

Gallows support

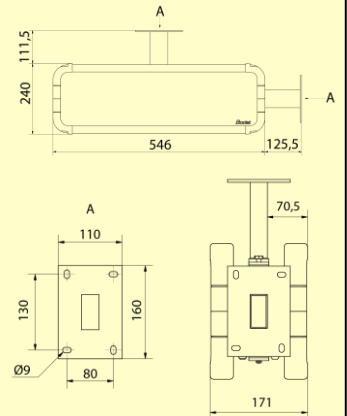

Wall bracket

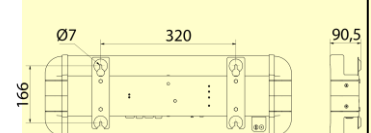

Style 12e references

- ▶ Independent / impulse receiver 935 A1x
- ▶ IRIG-B/AFNOR coded time receiver 935 A2x
- ▶ Radio synchronised FI signal 935 A5x
- ▶ Radio synchronised DCF signal 935 A6x
- ▶ Wireless DHF receiver 935 A7x

Indicate Led colour by choosing the "x" of the reference: red (1), yellow (3).

